



Headquarter:

1329-13, Gyeongchung-daero,
Chowol-eup, Gwangju-si, Gyeonggi-do,
Republic of Korea

John@theledforyou.com
www.theledforyou.com

+82 10 2513 0594 🇰🇷



The World's Premium LED Module & Converter



Republic of Korea



CONTENTS



LFU-C3SW-5630 SAMSUNG (9000K-12000K) COOL WHITE
LFU-C3SW-2835 SAMSUNG (9000K-12000K) COOL WHITE
LFU-C3SW-5630 SAMSUNG 165 DEGREE DIFFUSION LENS TYPE (9000K-12000K) COOL WHITE
LFUPC-3SWC-3W SAMSUNG (9000K-12000K) COOL WHITE



LFU-C3SW-5630 SAMSUNG (6020K-7040K) WHITE
LFU-C3SW-2835 SAMSUNG (6020K-7040K) WHITE
LFUC-3SW-2835 SAMSUNG 165 DEGREE DIFFUSION LENS TYPE (6020K-7040K) WHITE
LFU-C3SW-5630 SAMSUNG (2870K-3220K) WARM WHITE



LFU-C3SW-2835 SAMSUNG (2870K-3220K) WARM WHITE
LFUC-3SW-2835 SAMSUNG 165 DEGREE DIFFUSION LENS TYPE (2870K-3220K) WARM WHITE
LFU-C4SW-2835 SAMSUNG (9000K-12000K) COOL WHITE
LFU-C3SW-2835 HI-POWER (9000K-12000K) COOL WHITE



LFUC-3SW-2835 HI-POWER 165 DEGREE DIFFUSION LENS TYPE (9000K-12000K) COOL WHITE
LFUC-3SW-2835 MINI SAMSUNG 165 DEGREE DIFFUSION (9000K-12000K) COOL WHITE
LFU-C3SR HI-POWER RED COLOR
LFU-C3SG HI-POWER GREEN COLOR



LFU-C3SB HI-POWER BLUE COLOR
LFU-C3SY HI-POWER YELLOW COLOR
LFU-C3SC HI-POWER RGB
LFYM series OUTDOOR, METAL CASE, WATERPROOF



LFYMV2 series OUTDOOR, METAL CASE, WATERPROOF THE TRUE OUTPUT PERFORMANCE
LFYMPF series OUTDOOR, METAL CASE, PFC INSTALLED
LFYP series INDOOR, PLASTIC CASE

SAMSUNG

POWERED BY SAMSUNG LED CHIP

- LFU-C3SW-5630 SAMSUNG (9000K-12000K) COOL WHITE
- LFU-C3SW-2835 SAMSUNG (9000K-12000K) COOL WHITE
- LFU-C3SW-5630 SAMSUNG 165 DEGREE DIFFUSION LENS TYPE (9000K-12000K) COOL WHITE
- LFU-C3SW-5630 SAMSUNG (6020K-7040K) WHITE
- LFU-C3SW-2835 SAMSUNG (6020K-7040K) WHITE
- LFUC-3SW-2835 SAMSUNG 165 DEGREE DIFFUSION LENS TYPE (6020K-7040K) WHITE
- LFUPC-3SWC-3W SAMSUNG (9000K-12000K) COOL WHITE
- LFU-C3SW-5630 SAMSUNG (2870K-3220K) WARM WHITE
- LFU-C3SW-2835 SAMSUNG (2870K-3220K) WARM WHITE
- LFUC-3SW-2835 SAMSUNG 165 DEGREE DIFFUSION LENS TYPE (2870K-3220K) WARM WHITE
- LFU-C4SW-2835 SAMSUNG (9000K-12000K) COOL WHITE
- LFUC-3SW-2835 MINI SAMSUNG 165 DEGREE DIFFUSION (9000K-12000K) COOL WHITE



SAMSUNG



- 1.2W
- 126lm
- BOX & LETTER
- IP68 WATERPROOF
- 50,000 HOURS
- DC12V
- ANGEL 145° DEGREE
- 5 Year WARRANTY
- Constant Voltage
- 50pcs BUNDLE

SAMSUNG




- 1.2W
- 120lm
- BOX & LETTER
- IP68 WATERPROOF
- 50,000 HOURS
- DC12V
- ANGEL 145° DEGREE
- 5 Year WARRANTY
- Constant Voltage
- 50pcs BUNDLE


LFU-C3SW-5630

SAMSUNG (9000K-12000K) COOL WHITE

Dimensions

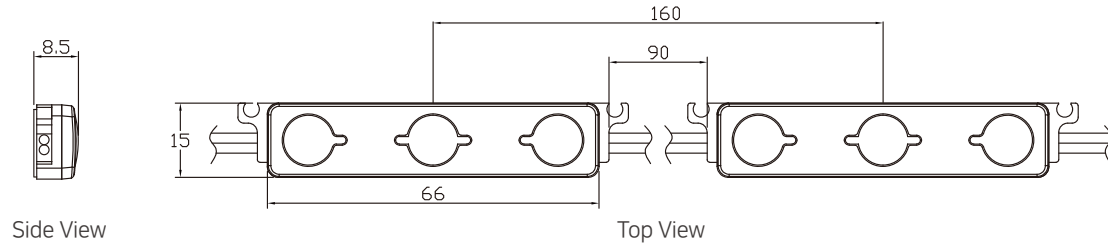

Application

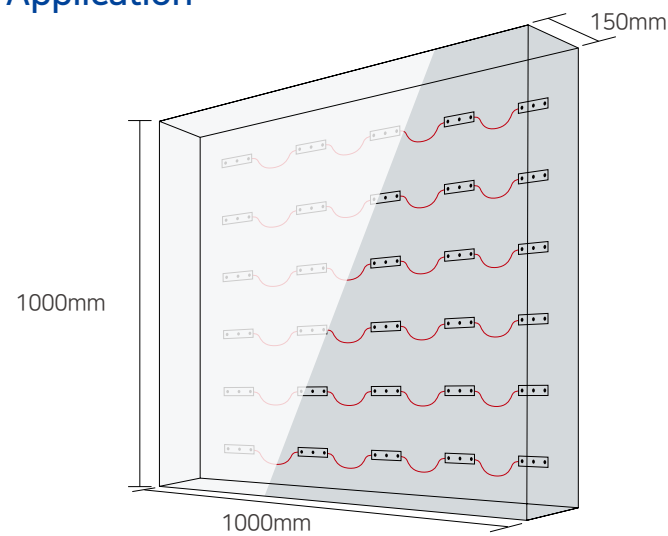

Number of Modules

30 pcs

Lumen output

3,780 lm

Power usage

36 W


※ the exact number of modules depends on the used materials and depth of application

04
LED FOR YOU


LFU-C3SW-2835

SAMSUNG (9000K-12000K) COOL WHITE

Dimensions

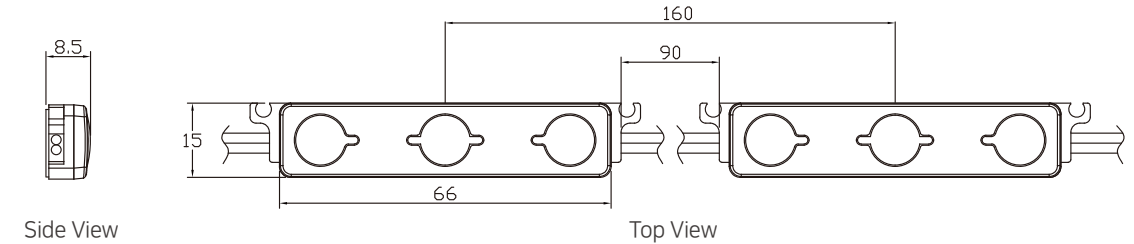

Application

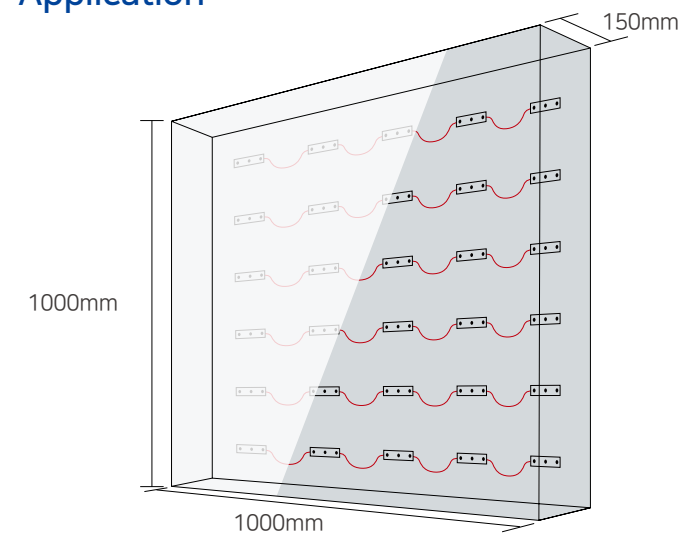

Number of Modules

30 pcs

Lumen output

3,600 lm

Power usage

36 W

※ the exact number of modules depends on the used materials and depth of application

05
LED FOR YOU




- 1.2W
- 120lm
- BOX& LETTER
- IP68 WATERPROOF
- 50,000 HOURS
- DC12V
- ANGEL 165° DEGREE
- 5 Year WARRANTY
- Constant Voltage
- 50 pcs BUNDLE

- 3W
- 240lm
- BOX& LETTER
- IP68 WATERPROOF
- 50,000 HOURS
- DC12V
- ANGEL 145° DEGREE
- 5 Year WARRANTY
- Constant Voltage
- 50 pcs BUNDLE


LFU-C3SW-2835

SAMSUNG 165 DEGREE DIFFUSION LENS TYPE
(9000K-12000K) COOL WHITE

Dimensions

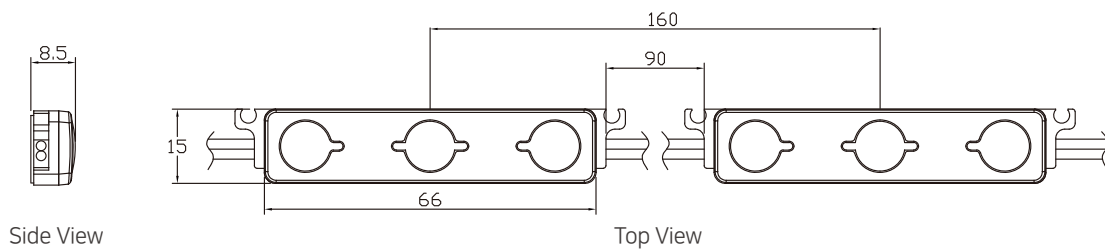

Application

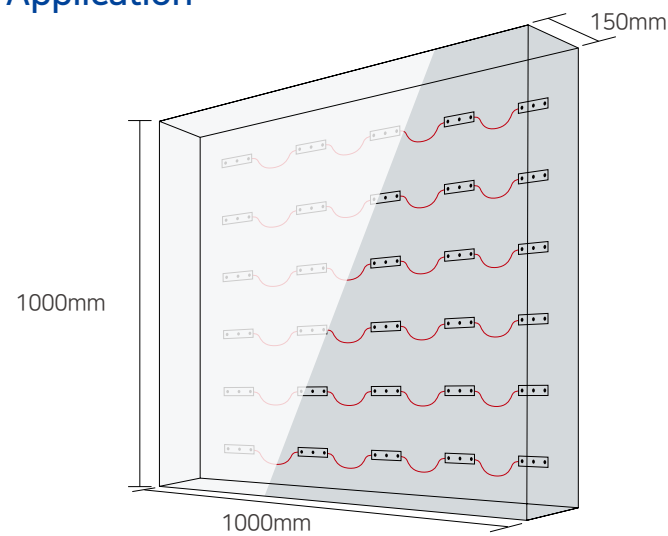

Number of Modules

30 pcs

Lumen output

3,600 lm

Power usage


36 W

※ the exact number of modules depends on the used materials and depth of application


LFUPC-3SWC-3W

SAMSUNG (9000K-12000K) COOL WHITE

Dimensions

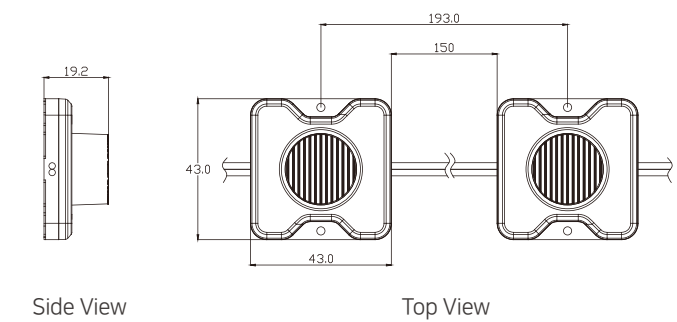

Application

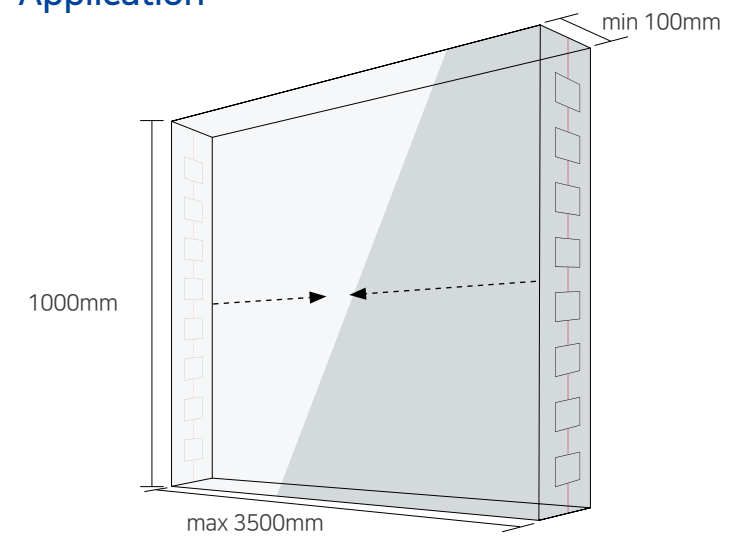

Number of Modules

16 pcs

Lumen output

3,840 lm

Power usage

48 W

※ the exact number of modules depends on the used materials and depth of application

SAMSUNG



- 1.2W
- 126lm
- BOX & LETTER
- IP68 WATERPROOF
- 50,000 HOURS
- DC12V
- ANGEL 145° DEGREE
- 5 Year WARRANTY
- Constant Voltage
- 50pcs BUNDLE

SAMSUNG




- 1.2W
- 120lm
- BOX & LETTER
- IP68 WATERPROOF
- 50,000 HOURS
- DC12V
- ANGEL 145° DEGREE
- 5 Year WARRANTY
- Constant Voltage
- 50pcs BUNDLE


LFU-C3SW-5630

SAMSUNG (6020K-7040K) WHITE


Dimensions

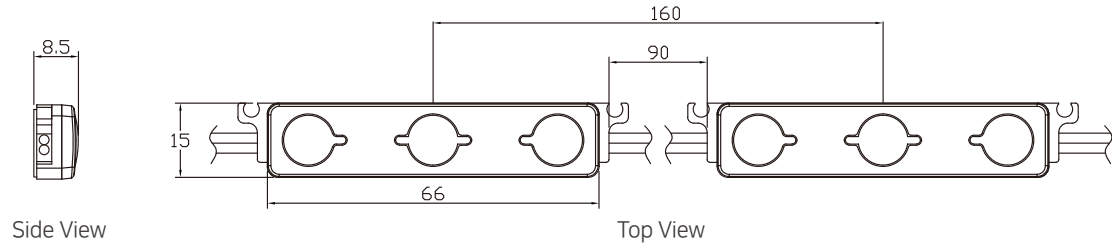

Dimensions

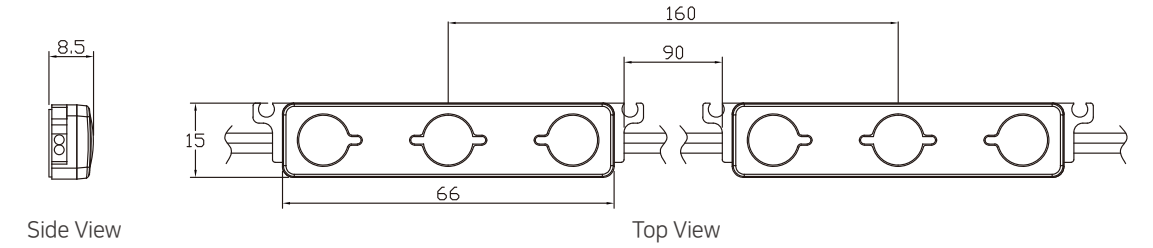

Application

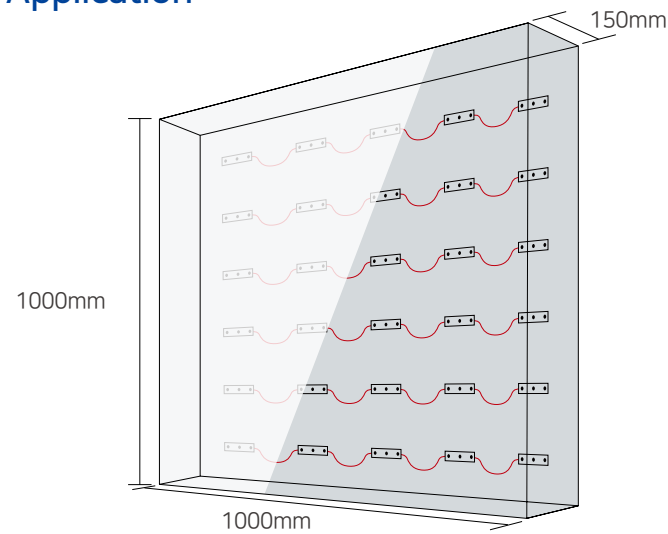

Number of Modules

30 pcs

Lumen output

3,780 lm


Power usage

36 W

※ the exact number of modules depends on the used materials and depth of application

08
LED FOR YOU

Application

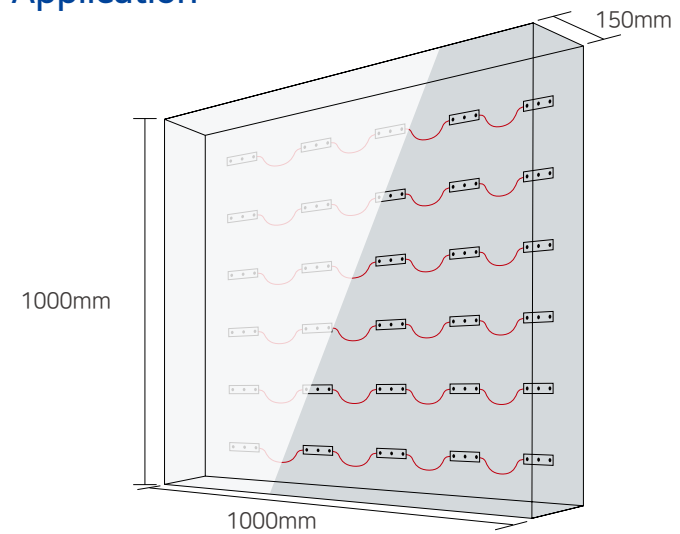

Number of Modules

30 pcs

Lumen output

3,600 lm

Power usage

36 W

※ the exact number of modules depends on the used materials and depth of application

09
LED FOR YOU



- 1.2W
- 120lm
- BOX& LETTER
- IP68 WATERPROOF
- 50,000 HOURS
- DC12V
- ANGEL 165 DEGREE
- 5 Year WARRANTY
- Constant Voltage
- 50pcs BUNDLE

- 1.2W
- 126lm
- BOX& LETTER
- IP68 WATERPROOF
- 50,000 HOURS
- DC12V
- ANGEL 145 DEGREE
- 5 Year WARRANTY
- Constant Voltage
- 50pcs BUNDLE


LFUC-3SW-2835

SAMSUNG 165 DEGREE DIFFUSION LENS TYPE
(6020K-7040K) WHITE


LFU-C3SW-5630

SAMSUNG (2870K-3220K) WARM WHITE


Dimensions

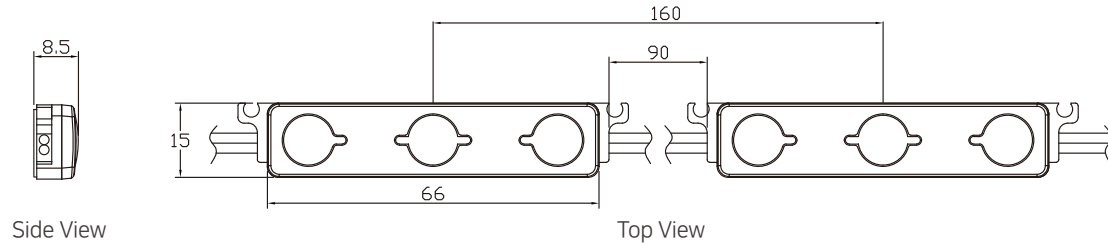

Dimensions

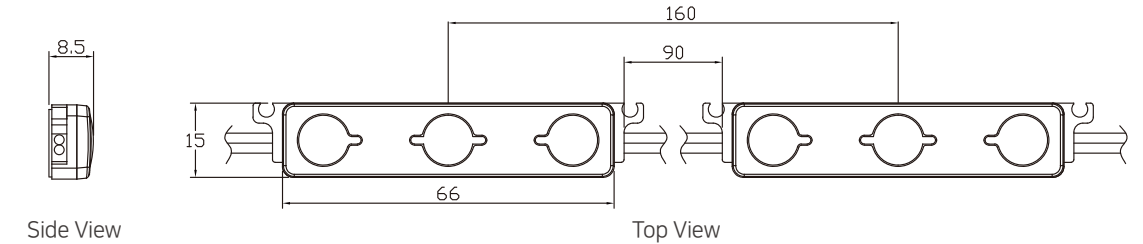

Application

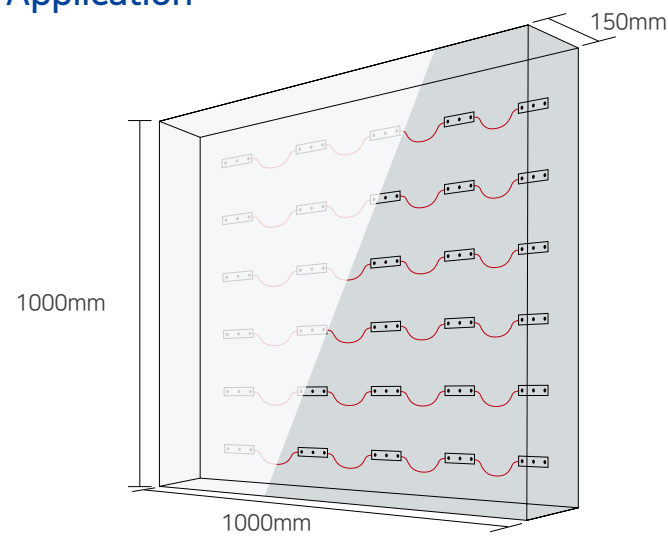

Number of Modules

30 pcs

Lumen output


3,600 lm

Power usage

36 w

※ the exact number of modules depends on the used materials and depth of application

Application

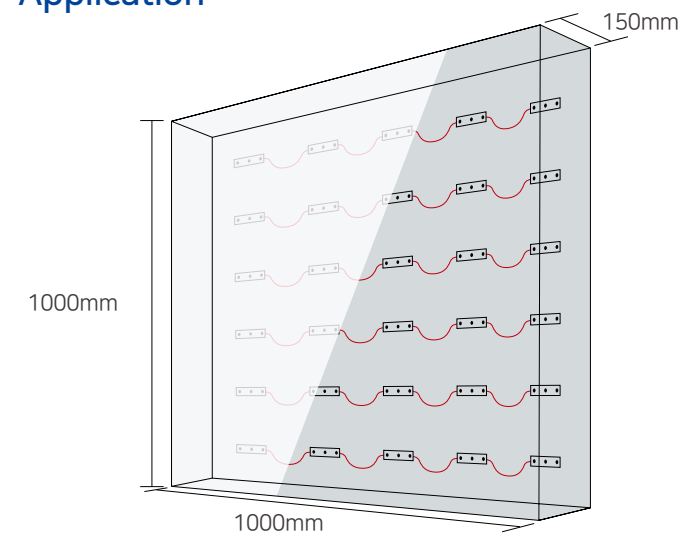

Number of Modules

30 pcs

Lumen output

3,780 lm

Power usage

36 w

※ the exact number of modules depends on the used materials and depth of application

SAMSUNG

SAMSUNG WIDE ANGEL




- 1.2W
- 120lm
- BOX & LETTER
- IP68 WATERPROOF
- 50,000 HOURS
- DC12V
- ANGEL 145° DEGREE
- 5 Year WARRANTY
- Constant Voltage
- 50 pcs BUNDLE

- 1.2W
- 120lm
- BOX & LETTER
- IP68 WATERPROOF
- 50,000 HOURS
- DC12V
- ANGEL 165° DEGREE
- 5 Year WARRANTY
- Constant Voltage
- 50 pcs BUNDLE


LFU-C3SW-2835

SAMSUNG (2870K-3220K) WARM WHITE


Dimensions

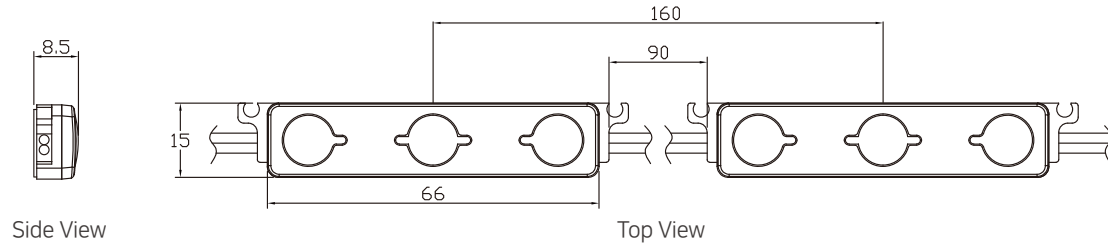

Dimensions

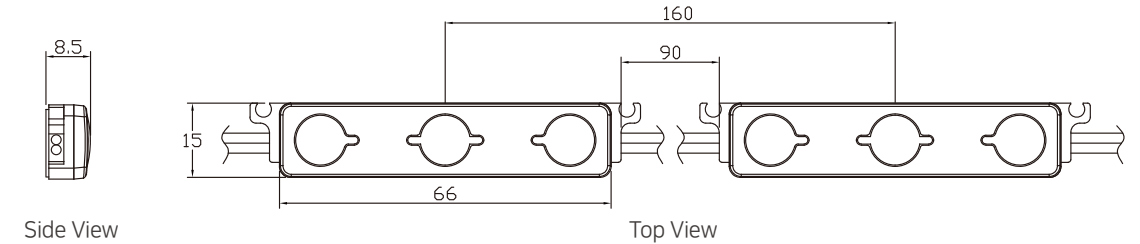

Application

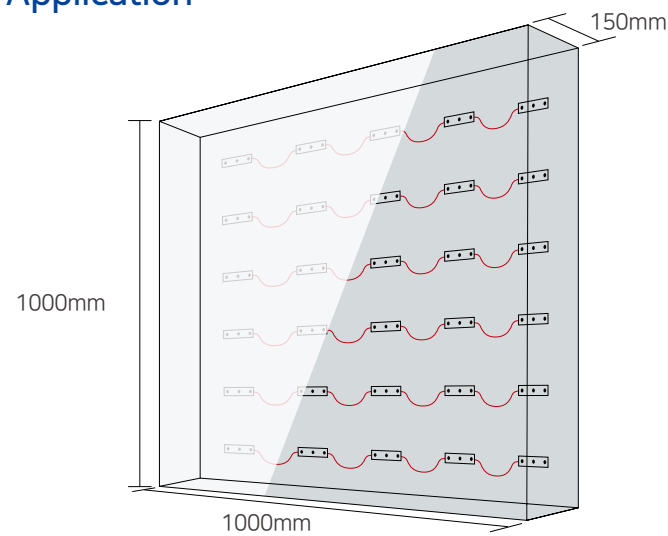

Number of Modules

30 pcs

Lumen output

3,600 lm


Power usage

36 w

※ the exact number of modules depends on the used materials and depth of application

12
LED FOR YOU

Application

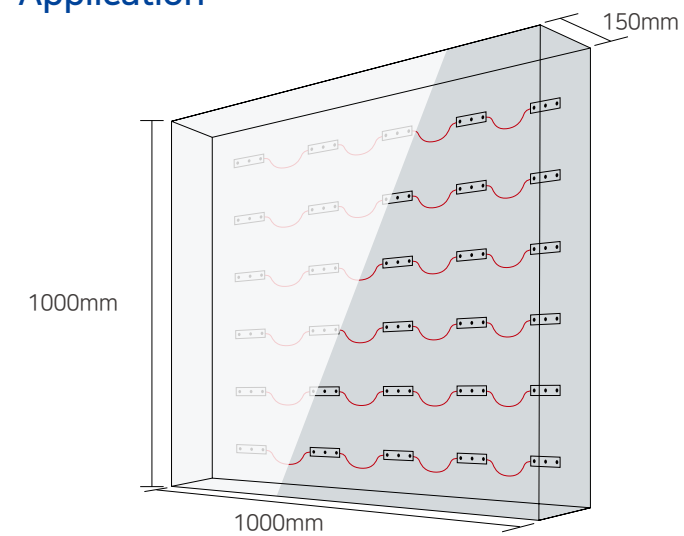

Number of Modules

30 pcs

Lumen output

3,600 lm

Power usage

36 w

※ the exact number of modules depends on the used materials and depth of application

13
LED FOR YOU

SAMSUNG



- 2.4W
- 168lm
- BOX & LETTER
- IP68 WATERPROOF
- 50,000 HOURS
- DC12V
- ANGEL 145° DEGREE
- 5 Year WARRANTY
- Constant Voltage
- 50pcs BUNDLE

HI-POWER




- 1.2W
- 100lm
- BOX & LETTER
- IP68 WATERPROOF
- 50,000 HOURS
- DC12V
- ANGEL 145° DEGREE
- 5 Year WARRANTY
- Constant Voltage
- 50pcs BUNDLE


LFU-C4SW-2835

SAMSUNG (9000K-12000K) COOL WHITE

Dimensions

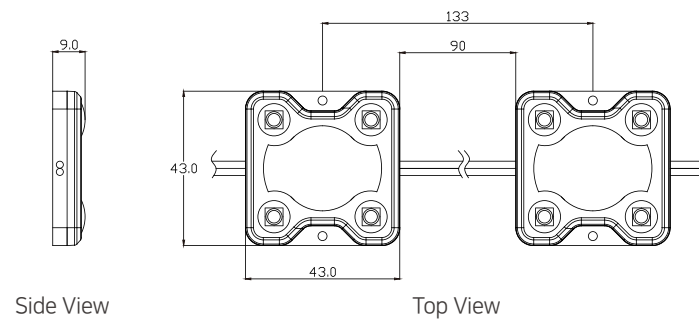

Application

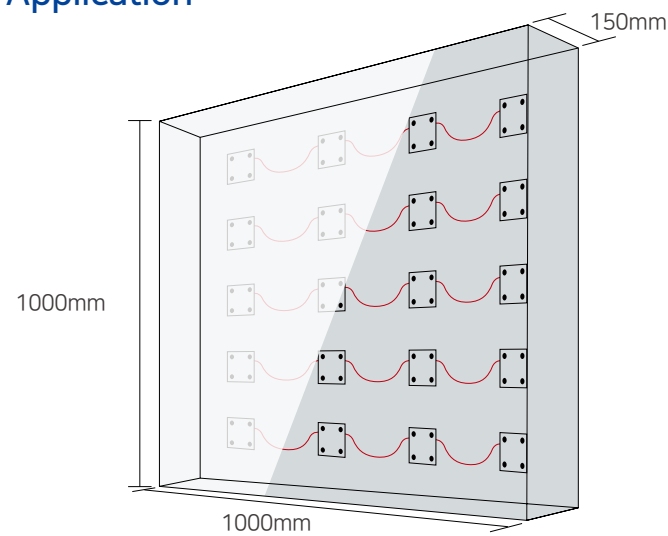

Number of Modules

20 pcs

Lumen output

3,360 lm

Power usage

48 W


※ the exact number of modules depends on the used materials and depth of application

14
LED FOR YOU


LFU-C3SW-2835

HI-POWER (9000K-12000K) COOL WHITE

Dimensions

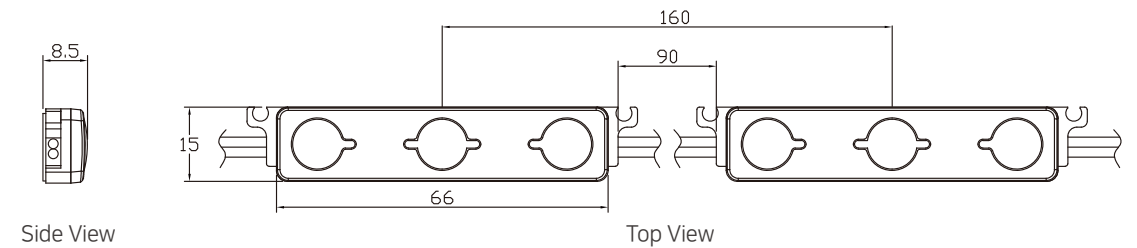

Application

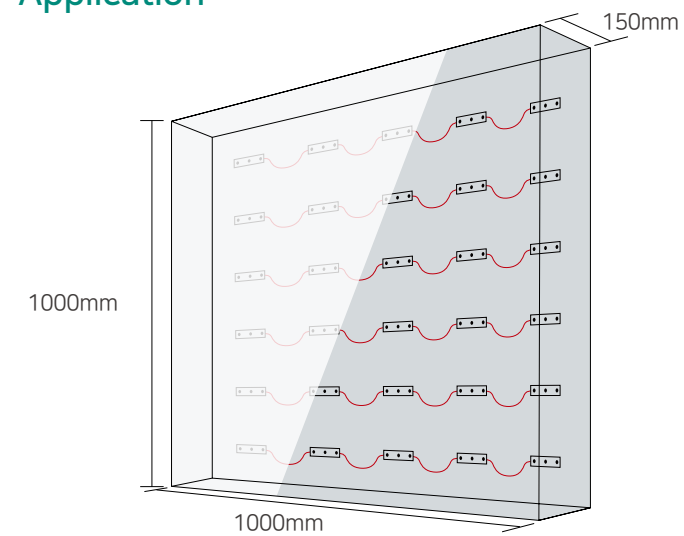

Number of Modules

30 pcs

Lumen output

3,000 lm

Power usage

36 W

※ the exact number of modules depends on the used materials and depth of application

15
LED FOR YOU



- 1.2W
- 100lm
- BOX & LETTER
- IP68 WATERPROOF
- 50,000 HOURS
- DC12V
- ANGEL 165° DEGREE
- 5 Year WARRANTY
- Constant Voltage
- 50pcs BUNDLE

- 0.72W
- 72lm
- BOX & LETTER
- IP68 WATERPROOF
- 50,000 HOURS
- DC12V
- ANGEL 165° DEGREE
- 5 Year WARRANTY
- Constant Voltage
- 50pcs BUNDLE


LFUC-3SW-2835

HI-POWER 165 DEGREE DIFFUSION LENS TYPE (9000K-12000K) COOL WHITE


LFUC-3SW-2835

MINI SAMSUNG 165 DEGREE DIFFUSION (9000K-12000K) COOL WHITE


Dimensions

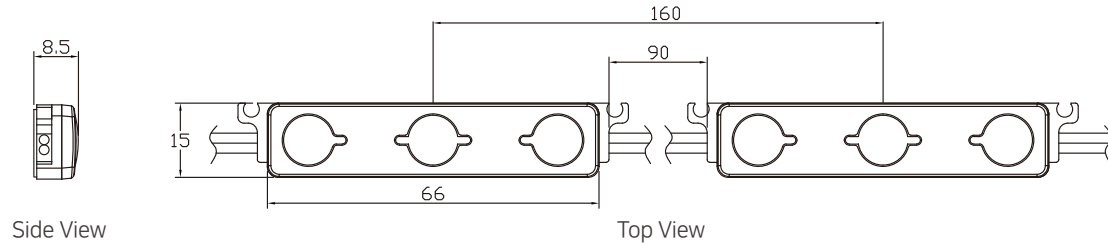

Dimensions

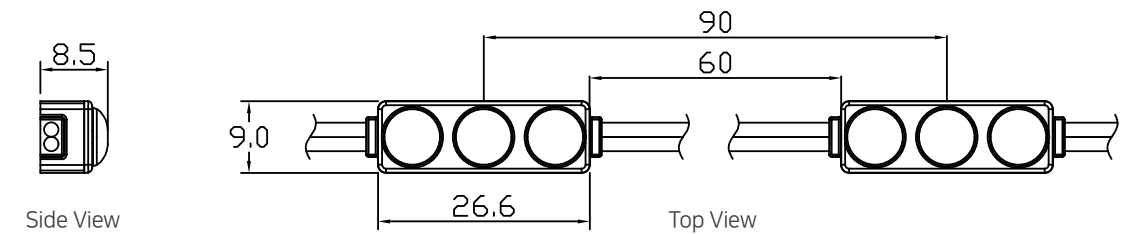

Application

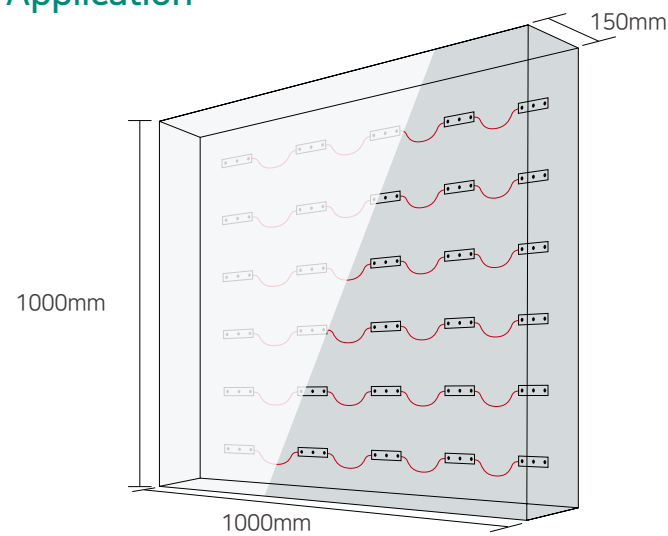

Number of Modules

30 pcs

Lumen output


3,000 lm

Power usage

36 w

※ the exact number of modules depends on the used materials and depth of application

Application

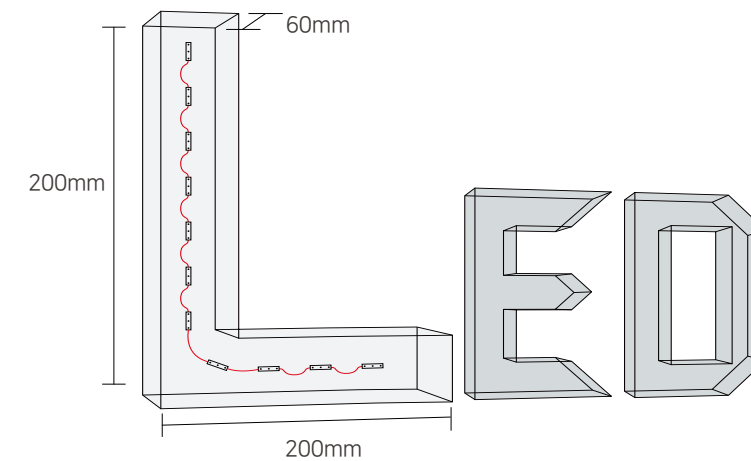

Number of Modules

11 pcs

Lumen output

792 lm

Power usage

7.92 w

※ the exact number of modules depends on the used materials and depth of application

HI-POWER

ENJOY THE COLOR

- LFU-C3SR HI-POWER RED COLOR
- LFU-C3SG HI-POWER GREEN COLOR
- LFU-C3SB HI-POWER BLUE COLOR
- LFU-C3SY HI-POWER YELLOW COLOR
- LFU-C3SC HI-POWER RGB




HI-POWER




- 0.72W
- 15.9lm
- BOX & LETTER
- IP68 WATERPROOF
- 50,000 HOURS
- DC12V
- ANGEL 145° DEGREE
- 5 YEARS WARRANTY
- Constant Voltage
- 50pcs BUNDLE

LFU-C3SR HI-POWER RED COLOR

Dimensions

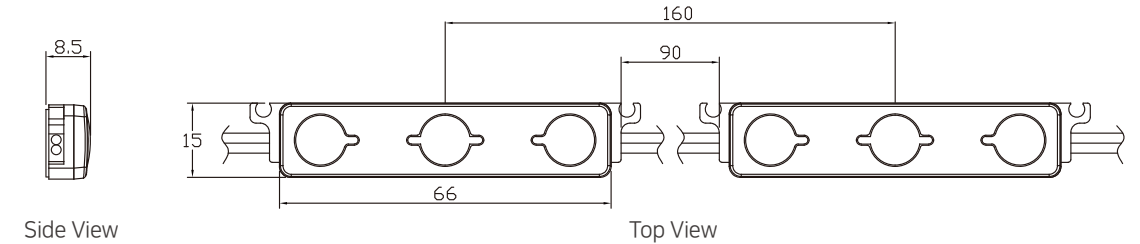

Application

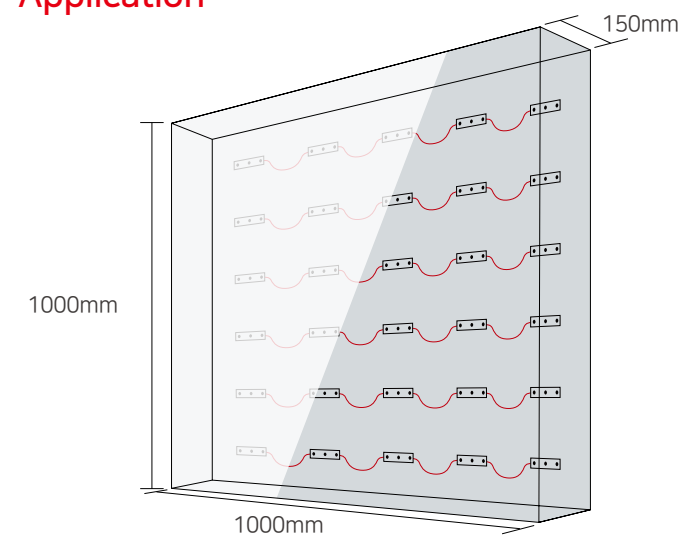

Number of Modules

30 pcs

Lumen output

477 lm

Power usage

21.6 W

※ the exact number of modules depends on the used materials and depth of application

HI-POWER



- 0.72W
- 28.8lm
- BOX & LETTER
- IP68 WATERPROOF
- 50,000 HOURS
- DC12V
- ANGEL 145° DEGREE
- 5 Year WARRANTY
- Constant Voltage
- 50pcs BUNDLE

HI-POWER




- 0.72W
- 11.7lm
- BOX & LETTER
- IP68 WATERPROOF
- 50,000 HOURS
- DC12V
- ANGEL 145° DEGREE
- 5 Year WARRANTY
- Constant Voltage
- 50pcs BUNDLE


LFU-C3SG

HI-POWER GREEN COLOR

Dimensions

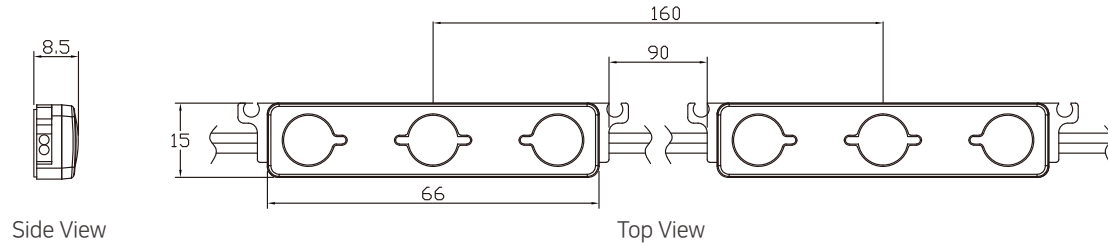

Application

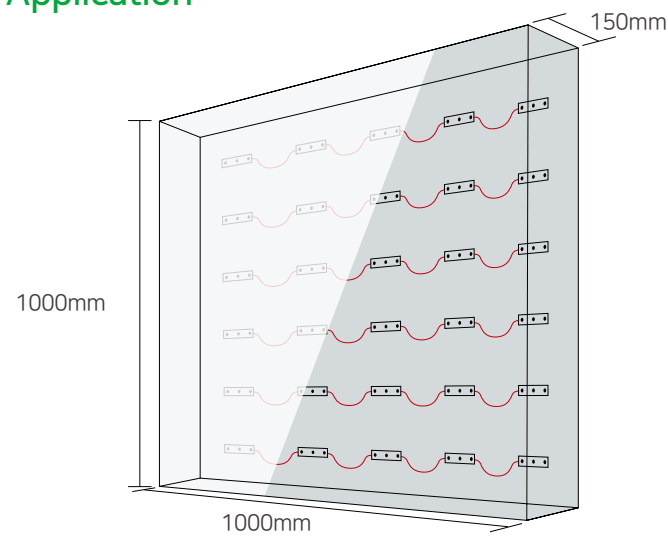

Number of Modules

30 pcs

Lumen output

864 lm

Power usage

21.6 w


※ the exact number of modules depends on the used materials and depth of application

20
LED FOR YOU


LFU-C3SB

HI-POWER BLUE COLOR

Dimensions

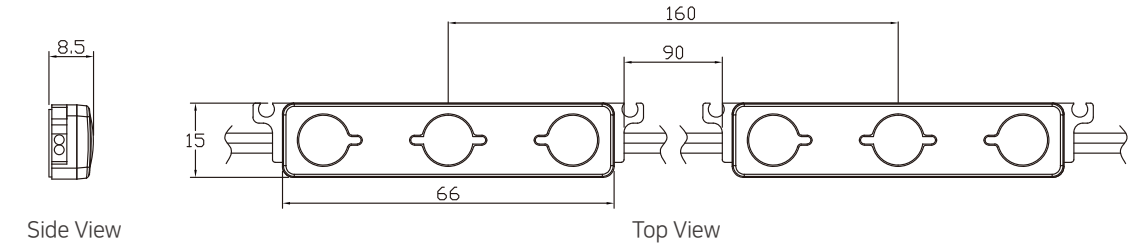

Application

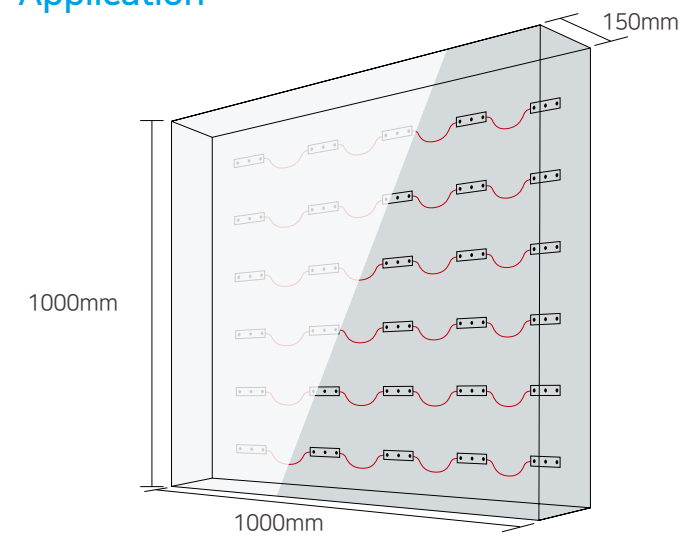

Number of Modules

30 pcs

Lumen output

351 lm

Power usage

21.6 w

※ the exact number of modules depends on the used materials and depth of application

21
LED FOR YOU

HI-POWER




- 0.72W
- 53.1lm
- BOX & LETTER
- IP68 WATERPROOF
- 50,000 HOURS
- DC12V
- ANGEL 145° DEGREE
- 5 Year WARRANTY
- Constant Voltage
- 50pcs BUNDLE


LFU-C3SY

HI-POWER YELLOW COLOR

Dimensions

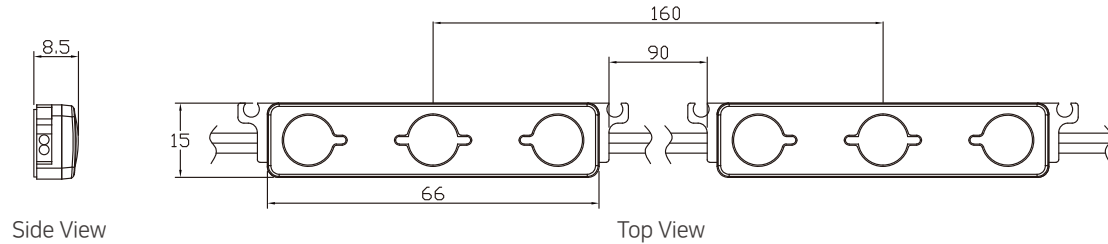

Application

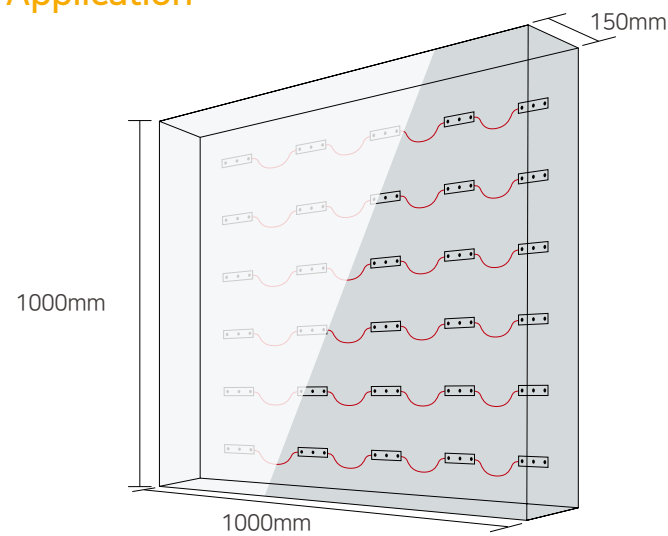

Number of Modules

30 pcs

Lumen output

1593 lm

Power usage

21.6 w

※ the exact number of modules depends on the used materials and depth of application

HI-POWER




- 0.72W
- 33lm
- BOX & LETTER
- IP68 WATERPROOF
- 50,000 HOURS
- DC12V
- ANGEL 145° DEGREE
- 5 Year WARRANTY
- Constant Voltage
- 50pcs BUNDLE


LFU-C3SC

HI-POWER RGB

Dimensions

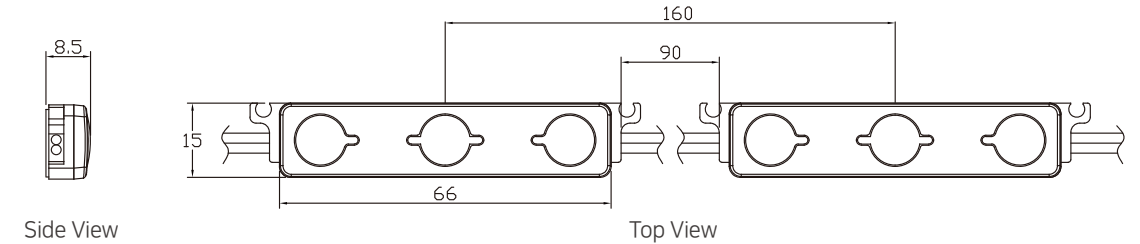

Application

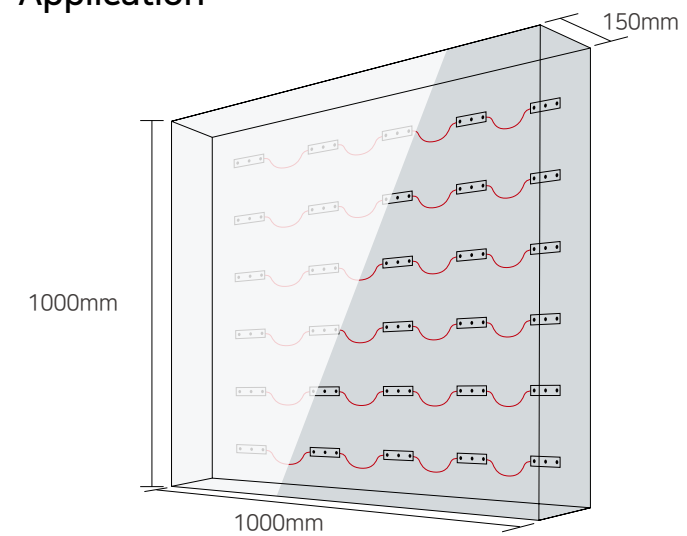

Number of Modules

30 pcs

Lumen output

990 lm

Power usage

21.6 w

※ the exact number of modules depends on the used materials and depth of application




Slim
DESIGN



RELIABLE
QUALITY



Best Seller



Slim
DESIGN



RELIABLE
QUALITY



True Output

LFYM series

OUTDOOR, METAL CASE, WATERPROOF

CE SASO CB IP68

MODEL	INPUT VOLTAGE	INPUT POWER	OUTPUT VOLTAGE	OUTPUT CURRENT	EFFICIENCY	SIZE/WEIGHT
LFY60M12V1	200V-240V	60W	12V	4.6A	93%	151*35*26 / 240g
LFY100M12V1	200V-240V	100W	12V	7.5A	93%	151*35*26 / 240g
LFY100MSA12V1	200V-240V	100W	12V	7.5A	93%	118*54*36 / 350g
LFY150MSA12V1	200V-240V	150W	12V	11.5A	93%	118*54*36 / 400g
LFY200MSA12V1	200V-240V	200W	12V	16A	93%	118*54*36 / 400g
LFY300MSA12V1	200V-240V	260W	12V	20A	93%	168*54*36 / 520g
LFY270M12V1	200V-240V	270W	12V	21A	93%	168*54*36 / 540g
LFY300M12V1	200V-240V	300W	12V	23A	93%	168*54*36 / 540g
LFY400M12V1	200V-240V	400W	12V	31A	93%	216*68*43 / 1040g
LFY430M12V1	200V-240V	430W	12V	33A	93%	216*68*43 / 1021g
LFY500M12V1	180V-264V	500W	12V	38A	93%	240*100*55 / 2100g
LFY600M12V1	180V-264V	700W	12V	46A	93%	240*100*55 / 2100g

LFYMV2 series

OUTDOOR, METAL CASE, WATERPROOF
THE TRUE OUTPUT PERFORMANCE

SASO CB IP68

MODEL	INPUT VOLTAGE	INPUT POWER	OUTPUT VOLTAGE	OUTPUT CURRENT	EFFICIENCY	SIZE/WEIGHT
LFY100M12V2	170V-240V	108W	12V	8.3A	92%	118*54*36 / 350g
LFY150M12V2	170V-240V	163W	12V	12.5A	92%	151*54*36 / 450g
LFY200M12V2	170V-240V	217W	12V	16.6A	92%	151*54*36 / 450g
LFY300M12V2	170V-240V	325W	12V	25A	92%	198.5*54*36 / 650g



LFYMPF series

OUTDOOR, METAL CASE, PFC INSTALLED



MODEL	INPUT VOLTAGE	INPUT POWER	OUTPUT VOLTAGE	OUTPUT CURRENT	EFFICIENCY	SIZE/WEIGHT
LFY60MPF12V1	100V-277V	60W	12V	4.5A	85%	118*54*36 / 350g
LFY100MPF12V1	100V-277V	100W	12V	8.0A	92%	168*54*36 / 450g
LFY150MPF12V1	100V-277V	150W	12V	11.5A	92%	199*54*36 / 630g
LFY200MPF12V1	100V-277V	200W	12V	15.5A	92%	199*54*36 / 630g
LFY300MPF12V1	100V-277V	300W	12V	23A	92%	216*68*43 / 950g

LFYP series

INDOOR, PLASTIC CASE



MODEL	INPUT VOLTAGE	INPUT POWER	OUTPUT VOLTAGE	OUTPUT CURRENT	EFFICIENCY	SIZE/WEIGHT
LFY30P12V1	200V-240V	30W	12V	2.2A	84%	168*25*18.5 / 140g
LFY60P12V1	200V-240V	60W	12V	4.5A	93%	174*35*18.5 / 150g
LFY60P12V1N	200V-240V	60W	12V	4.5A	84%	158*41*26.5 / 240g
LFY100P12V1	200V-240V	100W	12V	7.5A	93%	174*35*18.5 / 130g